


العروات ثنائية المعدن BT

تثبيت من خلال سنبك عميق



Bimetallic Lug, Crimping Punch & Die
Cosse bimetallique, Sertissage per poinçonnage

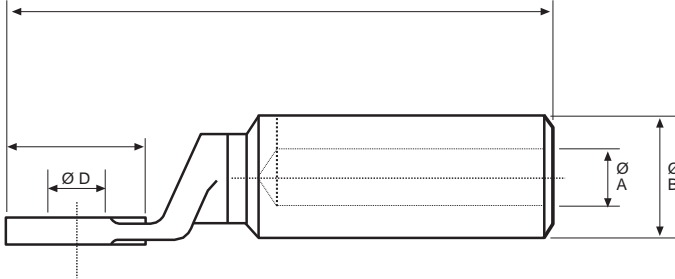

المادة:

CUETP S/UNE 37150-86

AL 99,5 S/UNE 38114-79

التشطيب:

مُخَمَل

المرجع	الأداة Tool / Outil	L	Ø D	Ø C	Ø B	Ø A	كابل مم ²	
BT - 16	PHH وكيس وسنبك Punch & die	81	10,5	20	20	5,5	16	
BT - 25		81	10,5	20	20	6,5	25	
BT - 35		81	10,5	20	20	8	35	
BT - 50/10		81	10,5	20	20	9	50	
BT - 50/12		90	12,8	26	20	9	50	
BT - 70		90	12,8	26	20	11	70	
BT - 95		90	12,8	26	20	12,5	95	
BT - 120		112	12,8	30	25	13,7	120	
BT - 150		112	12,8	30	25	15,5	150	
BT - 185		119	12,8	36	32	17	185	
BT - 240		119	12,8	36	32	19,5	240	
BT - 300		PHP-U20	153	16,5	42	36	23,3	300
BT - 400			153	16,5	42	36	26	400
BT - 300/40	163		16,5	42	40	23,3	300	
BT - 400/40	163		16,5	42	40	26	400	
BT - 500	200		4Ø9	60 x 60	47	29	500	
BT - 630	200		4Ø9	60 x 60	47	32,5	630	