


## Copper Joints (Muffs) Manchons de cuivre

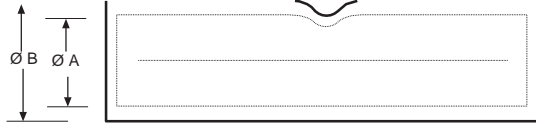

المادة:

**SFCU S/DIN 1787-73**

حتى M9-11

البقية: **SECU S/ DIN 1787-73** مطلي بالقصدير

المرجع	الأداة Tool / Outil	L	Ø C	Ø A	الكابل	
					مرن	عادي
M1,5 - 3	A6, TP3	15	3	1,5	1	1,5
M2,5 - 4		15	4	2,5	1,5	2,5
M3 - 5		22	5	3	2,5	4
M4 - 6		22	6	4	4	6
M5 - 7	T50, TP3	28	7	5	6	10
M6 - 8	T50, TP5	31	8	6	10	16
M7 - 9	T50, T95	32	9	7	16	25
M8 - 10		34	10	8	25	35
M9 - 11		40	11	9	35	40
M10 - 13		45	12,7	10,2	35	50

المرجع	الأداة Tool / Outil	L	Ø C	Ø A	الكابل	
					مرن	عادي
M11 - 14	T95, T150, PHC	48	14	11,5	50	63
M12 - 15		50	15	12	63	80
M13 - 16		52	16,5	13,5	70	95
M15,5 - 19	T150, PHC, HMS	62	19	15,5	95	120
M17 - 21		66	21	17	120	150
M19 - 23		69	23	19	150	185
M21 - 25,5		75	25,5	21	185	240
M23 - 28	PHC, PHH	89	28	23	240	300
M27 - 33		105	33	27	300	400
M30 - 36	PHP, U20	115	36	30	400	500
M34 - 40		150	40	34	500	600